

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REWSEK	APPD

Note:

1.Material:



- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.5 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell:Nickel Plated.

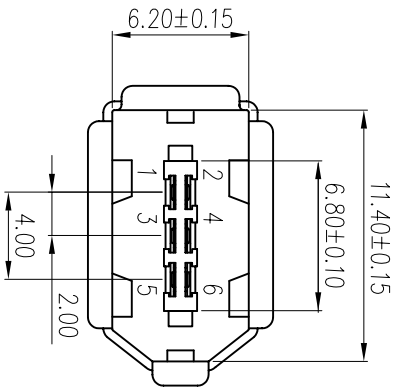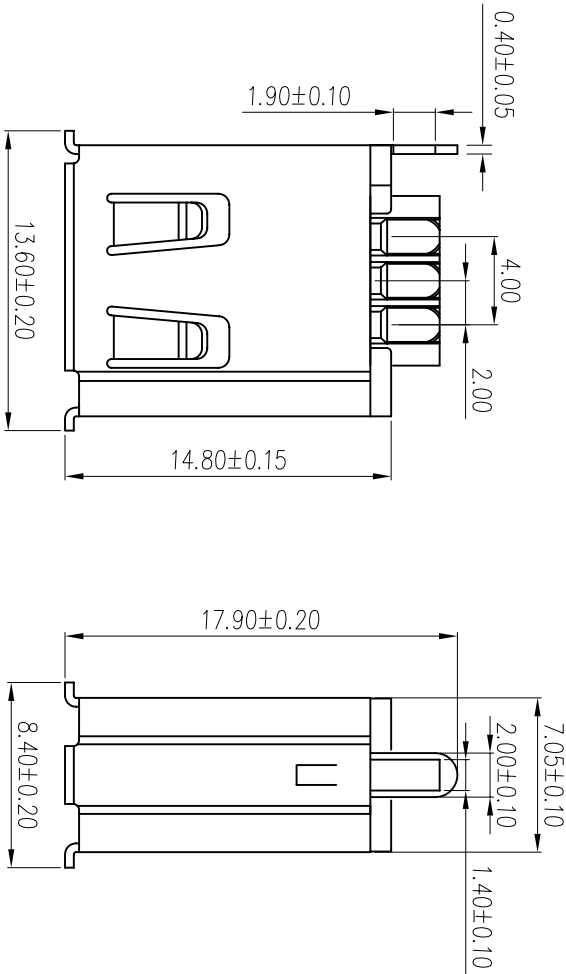

3	Shell	1	Brass	T=0.40mm	Nickel Plated
2	Contact	6	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:			MATERIAL:		
MODEL NO:			FINSH:		
UNIT:	mm	SIZE: A4	COLOR:		
TOLERANCE UNSPECIFIED			PART NAME:		
.x	±0.3	DR: 段林輝	IEEE 1394-6PIN (F) SOLDER		
.xx	±0.20	06/03/01	DWG NO:		
.xxx	±0.100	CHK: Song	S/A-344		
ANG.	±T	APP: Kent	SCALE: 3:1		
			SHEET: 1 of 1		
			REV: A0		